

产品特性/Product Features

- IP6K9K
- 100A 85°C
- 12-750VDC
- 1000MΩ (1000VDC) , IEC 60664-1

High Voltage Ceramic Contactors	
	1a
	≤3mΩ (at 20A)
	100A
	2×10 ⁵
	450V型
	1000VDC
	1000A(320VDC)1
	45kW
1)	2×10 ⁻⁴ 22.5VDC, =1ms 400A, 100A
	1 360VDC, =1ms 1350A, 100A
	1×10 ⁻⁴ 360VDC,50A
	: 3×10 ⁻³ 450VDC,100A
	750V型
	1000VDC
	1000A(320VDC)1
	75kW
	2×10 ⁻⁴ 37.5VDC, =1ms 400A, 100A
	6×10 ⁻³ 600VDC,50A
	: 1×10 ⁻³ 750VDC,100A
2)	100A:
	120A:2h
	200A:10min
	400A:2min
	600A:30s
	1000A:0.6s
1)	23°C, 0.6s:5.4s.
2)	85°C, 40 mm ² , " "

1000MΩ(1000VDC)	
	3000VAC 1min
	3000VAC 1min
()	≤30ms
()	≤10ms
	196m/s ²
	490m/s ²
	10Hz ~ 500Hz 49m/s ²
	5% ~ 85%RH
	-40°C ~ 85°C
	M5
	350g
	76.5mm×39.0mm×77.0mm


VDC	VDC	VDC	W
12	9	1	4.5
24	≤18	≥2	4.5

-40°C ~ 85°C)




/Unit mm





Electrical life curve a

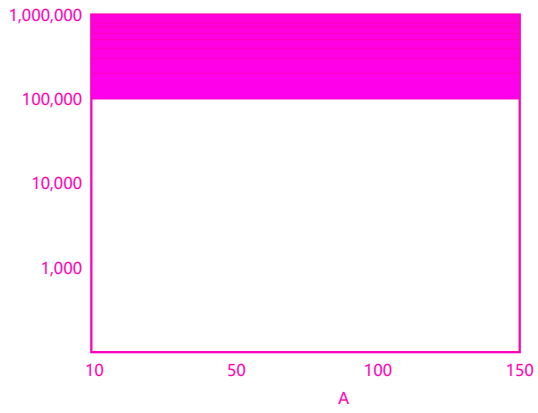

Tolerance curve

